



Main

Range of product	Modicon Premium Automation platform
Product or component type	Analog input module
Input level	Low level
Analogue input number	4
Analogue input type	Current 4...20 mA Resistor 0...3850 Ohm Resistor 0...400 Ohm Temperature probe Ni 1000 2 wires Temperature probe Ni 1000 4 wires Temperature probe Pt 100 2 wires Temperature probe Pt 100 4 wires Temperature probe Pt 1000 2 wires Temperature probe Pt 1000 4 wires Thermocouple thermocouple B Thermocouple thermocouple E Thermocouple thermocouple J Thermocouple thermocouple K Thermocouple thermocouple L Thermocouple thermocouple N Thermocouple thermocouple R Thermocouple thermocouple S Thermocouple thermocouple T Thermocouple thermocouple U Voltage - 13...63 mV Voltage +/- 10 V Voltage +/- 5 V Voltage 0...10 V Voltage 0...5 V Voltage 1...5 V
Analog/Digital conversion	16 bits

Complementary

Nominal read cycle time	550 ms
Measurement error	0.13 % of full scale 0...400 Ohm 25 °C 0.16 % of full scale 0...10 V 25 °C

0.19 % of full scale - 13...63 mV 25 °C
 0.22 % of full scale 0...3850 Ohm 25 °C
 0.22 % of full scale 0...5 V 25 °C
 0.27 % of full scale +/- 10 V 25 °C
 0.27 % of full scale +/- 5 V 25 °C
 0.27 % of full scale 0...400 Ohm 0...60 °C
 0.27 % of full scale 1...5 V 25 °C
 0.39 % of full scale 0...10 V 0...60 °C
 0.44 % of full scale - 13...63 mV 0...60 °C
 0.45 % of full scale 0...5 V 0...60 °C
 0.45 % of full scale 4...20 mA 25 °C
 0.48 % of full scale 0...3850 Ohm 0...60 °C
 0.5 % of full scale +/- 10 V 0...60 °C
 0.5 % of full scale +/- 5 V 0...60 °C
 0.56 % of full scale 1...5 V 0...60 °C
 0.86 % of full scale 4...20 mA 0...60 °C
 1.5 °C thermocouple B external 25 °C
 1.5 °C thermocouple E external 25 °C
 1.5 °C thermocouple T external 25 °C
 1.5 °C thermocouple U external 25 °C
 1.8 °C thermocouple J external 25 °C
 10.5 °C thermocouple K internal 0...60 °C
 11 °C thermocouple R internal 0...60 °C
 12 °C thermocouple S internal 0...60 °C
 2 °C thermocouple L external 25 °C
 2 °C thermocouple N external 25 °C
 2.3 °C thermocouple K external 25 °C
 3.1 °C thermocouple U external 0...60 °C
 3.2 °C thermocouple E external 0...60 °C
 3.2 °C thermocouple R external 25 °C
 3.2 °C thermocouple T external 0...60 °C
 3.4 °C thermocouple S external 25 °C
 3.5 °C thermocouple B external 0...60 °C
 3.5 °C thermocouple B internal 25 °C
 3.8 °C thermocouple J external 0...60 °C
 4.1 °C thermocouple L external 0...60 °C
 4.3 °C thermocouple N external 0...60 °C
 4.7 °C thermocouple K external 0...60 °C
 5.4 °C thermocouple U internal 25 °C
 6 °C thermocouple N internal 25 °C
 6 °C thermocouple R internal 25 °C
 6.1 °C thermocouple E internal 25 °C
 6.6 °C thermocouple S internal 25 °C
 6.6 °C thermocouple T internal 25 °C
 7.3 °C thermocouple J internal 25 °C
 7.3 °C thermocouple U internal 0...60 °C
 7.5 °C thermocouple L internal 25 °C
 7.7 °C thermocouple R external 0...60 °C
 7.8 °C thermocouple K internal 25 °C
 8.1 °C thermocouple B internal 0...60 °C
 8.1 °C thermocouple E internal 0...60 °C
 8.5 °C thermocouple S external 0...60 °C
 8.7 °C thermocouple N internal 0...60 °C
 8.8 °C thermocouple T internal 0...60 °C
 9.5 °C thermocouple J internal 0...60 °C
 9.8 °C thermocouple L internal 0...60 °C
 1 °C Ni 1000 25 °C
 1.2 °C Pt 100 25 °C
 2 °C Ni 1000 0...60 °C
 2.4 °C Pt 100 0...60 °C
 2.5 °C Pt 1000 25 °C
 5 °C Pt 1000 0...60 °C

Isolation between channels and bus	1780 Vrms
Isolation between channels and ground	1780 Vrms
Isolation between channels	2830 Vrms
Common mode between channels	415 V AC or 200 V DC
Common mode between channels and earth	240 V AC or 110 V DC
Maximum overvoltage on input	-15...15 V at state 0 250 Ohm -30...30 V at state 1 250 Ohm
Electrical connection	Screw terminal block

Overcurrent	-30...30 mA at state 1 250 kOhm
Marking	CE
Current consumption	660 mA 5 V DC
Module format	Standard
Product weight	0.32 kg

Environment

Standards	NFC 42-330 DIN 43710 IEC 584 DIN 43760 IEC 751 IEC 1131
Product certifications	RMRS DNV GL RINA LR ABS BV
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0826 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

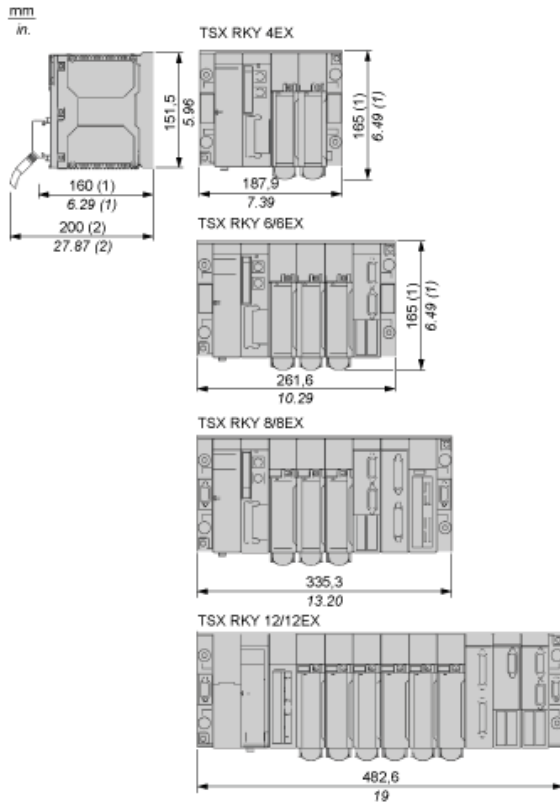


(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

Analog Input Module (4-Channel, Voltage/Current/Thermocouple/Temperature Probe)

Terminal Block Pin Assignment

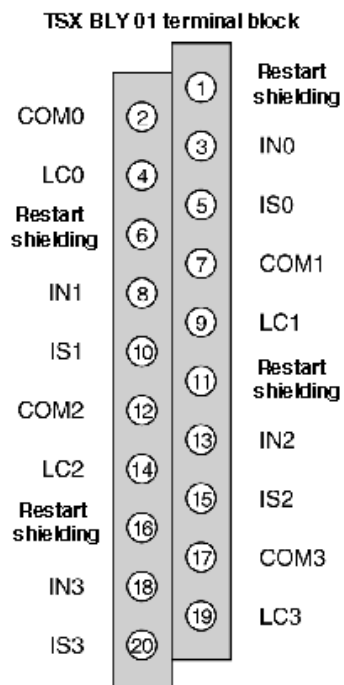

INx + Pole input of channel x
 COMx Pole input of channel x
 ISx + Pole supply of the probe
 LCx Line compensation